


Innerliner - Laminated

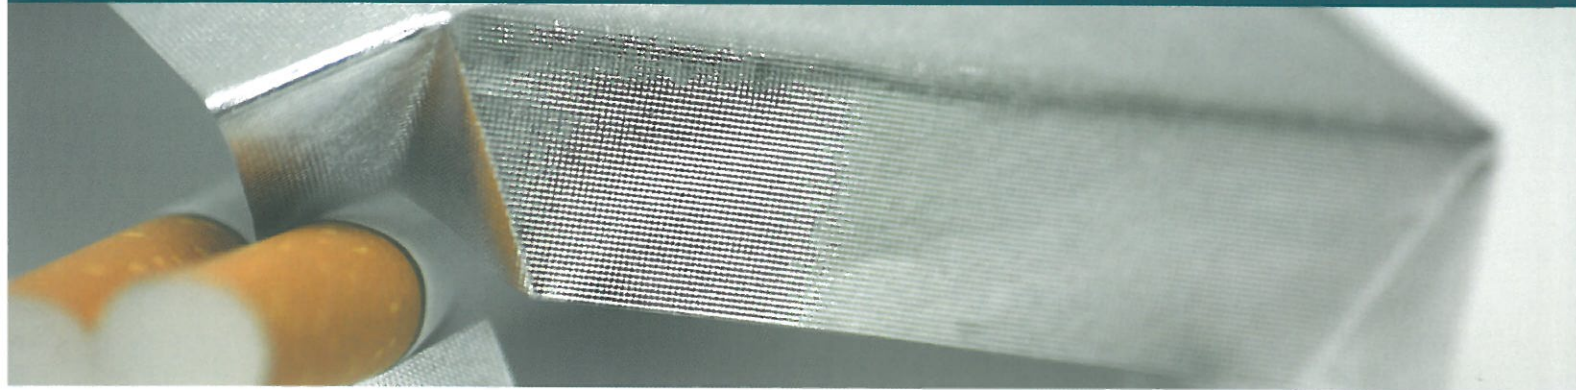

DESCRIPTION

Foil for the Innerliner of cigarette packets is made up of a multi-ply laminating process, the lamination of aluminium foil to paper using a starch based adhesive. Production of this laminate uses an aluminium foil of 6.35 to 9 μm and paper of between 25 and 50 gsm.

The surface of the aluminium foil is coated by a slip lacquer giving good performance in high-speed automated packing machines. The lacquer can be colourless or shaded to specific tints, the most common being gold.

We also offer foil lacquer-free and laminates can be embossed.


TYPICAL APPLICATION

- The Innerliner of the cigarette packets.

STANDARD MANUFACTURED DIMENSIONS

We offer standard Innerliner foils produced with combinations of Al foil from 6.35 to 9 microns and Paper from 25 to 50 gsm.

Laminate composition:

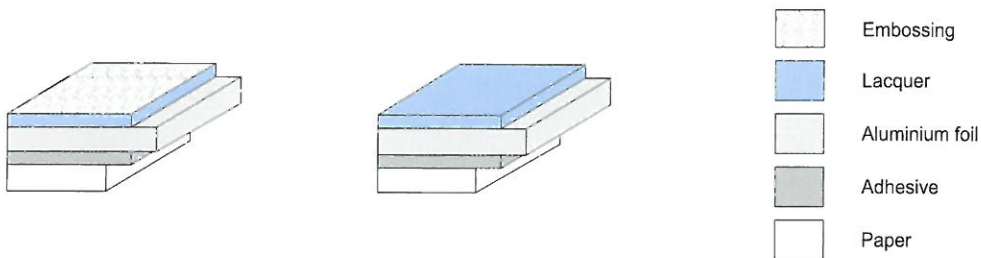

For deliveries of any modifications of the products listed in our product specification please contact one of our Key Account Managers to discuss your individual needs.

