


Finstock automotive

- for mechanical heat exchangers

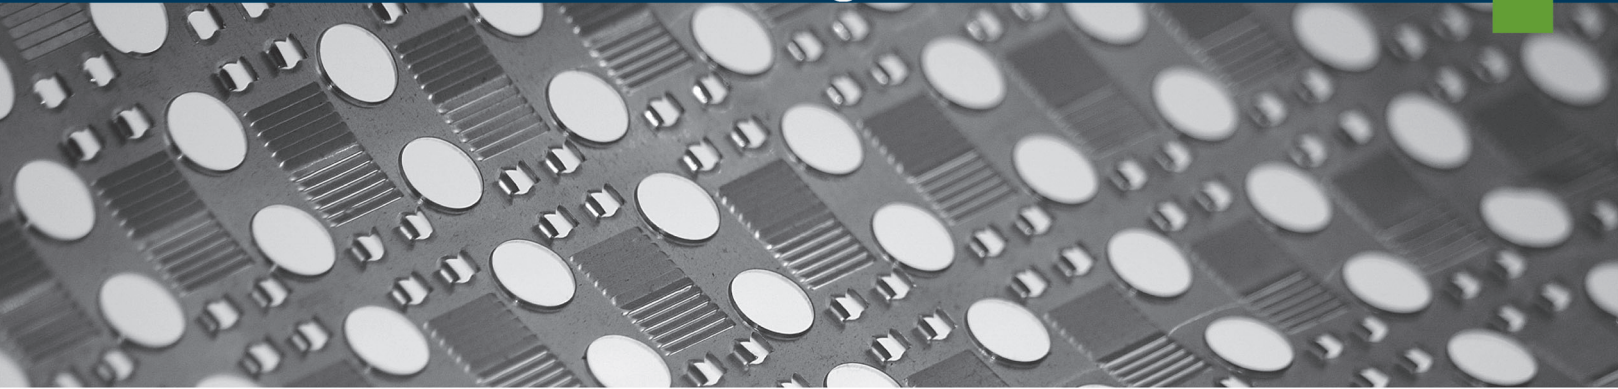

DESCRIPTION

Finstock are foils from aluminium or its alloys with a thickness of between 0.06 to 0.10 mm.

TYPICAL APPLICATIONS

- Finstock is used in the manufacture of mechanical heat exchangers, air-conditioning and cooling systems within the automotive industry.

STANDARD MANUFACTURED MATERIAL

Material in Accordance with EN 573-3	Temper in Accordance with EN 546-2	Tolerance [%]
EN AW-1050A [Al 99.5]	H18, H19	±5
EN AW-7072A [Al Zn1]	H18, H19	±5

WIDTH TOLERANCE IN ACCORDANCE WITH EN 683-3

For deliveries of material not specified above please contact one of our Key Account Managers to discuss your individual needs.